


fitt metalflex

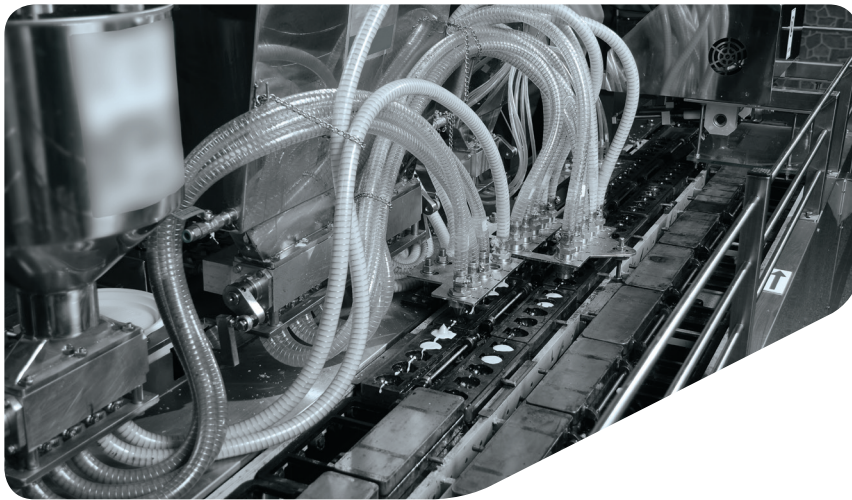

PVC软管采用镀锌钢丝螺旋加强，内外壁光滑，适合抽吸传输食品级液体。螺距的降低以防止管内阻塞或流量的减少，同时保证了出色的弯曲半径。FITT Metalflex 软管具有耐高温和低温的性能，也适用于传输排放海水。

对于模拟物A-B-C-D1，符合欧盟法规Reg. (EU) 10/2011的要求。

Hose for food liquid suction and delivery.
PVC hose with spiral in galvanized spring steel with reduced pitch that guarantees an excellent bending radius.

In compliance with the European Regulation Reg. (EU) 10/2011 for simulants A-B-C-D1.

- 抗挤压 - Crush resistance
- 柔性 - Flexibility
- 内壁光滑度 - Smooth internal surface
- 抗紫外线 - UV resistance
- 10°C/+65°C 工作温度 - Working temperature



英寸 Inches	内径 Ø internal	外径 Ø external	壁厚 Thickness	工作压力 Working pressure	爆破压力 Bursting pressure	负压 Vacuum	弯曲半径 Bending radius	长度 Length	每米重量 Weight per meter
inc	mm	mm	mm	bar	bar	mH ₂ O	mm	m	g/m
-	10	16,00	3,0	9	27	9	25	30	160
-	12	18,00	3,0	9	27	9	30	30	180
-	12	18,00	3,0	9	27	9	30	60	180
-	13	19,20	3,1	9	27	9	30	30	190
-	14	20,40	3,2	8	24	9	30	30	200
-	16	22,60	3,3	8	24	9	35	30	250
-	16	22,60	3,3	8	24	9	35	60	250
-	18	25,00	3,5	8	24	9	40	30	280
-	19	26,00	3,5	7	21	9	40	30	305
-	20	27,20	3,6	7	21	9	45	30	340
-	25	33,00	4,0	6	18	9	55	30	510
-	30	38,00	4,0	5	15	9	70	30	600
-	32	40,20	4,1	5	15	9	75	30	650
-	35	43,40	4,2	4	12	9	85	30	730
-	38	47,00	4,5	4	12	9	90	30	800
-	40	49,00	4,5	4	12	9	95	30	870
-	45	55,00	5,0	4	12	8	105	30	1100
-	51	61,40	5,2	3	9	8	120	30	1200
-	60	72,00	6,0	3	9	8	150	30	1800
-	63	75,00	6,0	3	9	8	160	30	1950
-	70	82,00	6,0	2,5	7,5	8	175	30	2200
-	76	88,00	6,0	2,5	7,5	8	190	30	2500
-	80	92,42	6,2	2,5	7,5	8	220	30	2700
-	90	104,00	7,0	2,5	7,5	7	245	30	3000
-	102	117,00	7,5	2,5	7,5	7	280	30	3400
-	110	125,00	7,5	2	6	6	345	30	3670
-	120	135,40	7,7	2	6	6	375	30	4400
-	127	143,00	8,0	2	6	6	410	30	4700
-	152	168,80	8,4	1	4	6	490	30	6350
-	152	168,80	8,4	1	4	6	490	20	6350

工作 / 爆破压力为常温23°C时的数值
Working and Bursting pressure at 23°C