


fit multiflex xtreme

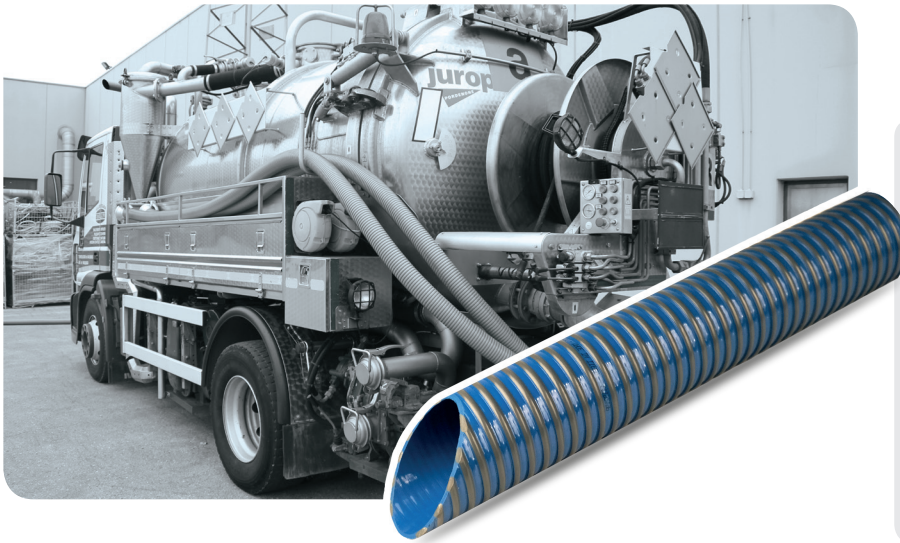

在低温环境中依然极其柔软的软管，适用于灌溉、槽罐车、下水道和化粪池的强力抽吸输送。PVC螺旋软管采用硬质抗震PVC螺旋加强。

Extremely flexible hose at low temperatures for heavy-duty suction and delivery for irrigation, tankers, sewer drains and cesspools. PVC hose with reinforcement spiral in rigid shock-resistant PVC.

- 抗挤压 - Crush resistance
- 耐磨损 - Abrasion resistance
- 内壁光滑度 - Smooth internal surface
- 低温柔韧性 - Cold flexibility
- 抗紫外线 - UV resistance
- 40°C/+45°C 工作温度 - Working temperature



英寸 Inches	内径 Ø internal	外径 Ø external	壁厚 Thickness	工作压力 Working pressure	爆破压力 Bursting pressure	负压 Vacuum	弯曲半径 Bending radius	长度 Length	每米重量 Weight per meter
inc	mm	mm	mm	bar	bar	mH ₂ O	mm	m	g/m
1	25	32,60	3,80	7	21	9	90	50	475
1 1/4	32	40,00	4,00	6	18	9	110	50	570
1 1/2	38	46,40	4,20	5	15	9	130	50	665
	40	48,60	4,30	5	15	9	140	50	760
2	51	61,60	5,30	4	12	9	170	50	1045
	60	71,00	5,50	4	12	9	200	50	1188
2 1/2	63	74,00	5,50	4	12	9	210	50	1320
	70	81,60	5,80	3	9	9	240	50	1570
3	76	88,00	6,00	3	9	9	260	30	1650
	76	88,00	6,00	3	9	9	260	50	1650
3 1/2	80	92,60	6,30	3	9	9	270	30	1830
	80	92,60	6,30	3	9	9	270	50	1830
3 1/2	90	103,00	6,50	3	9	9	300	30	2138
4	102	115,60	6,80	3	9	9	340	30	2565
	120	135,60	7,80	2	6	9	400	20	3450
5	127	142,80	7,90	2	6	9	420	20	3705
6	152	169,80	8,90	2	6	9	510	4,6	4990
6	152	169,80	8,90	2	6	9	510	6	4990
				2	6	9	510	20	4990

工作 / 爆破压力为常温23°C时的数值
Working and Bursting pressure at 23°C

软管内径的大小以及对应的公差范围根据UNI EN ISO 1307:2008标准进行设定和控制。长度公差为±5%
Inner diameters and corresponding tolerances according to the norm UNI EN ISO 1307:2008. The length tolerance is ± 5%