


fitt refittex 20 bar ultræflex

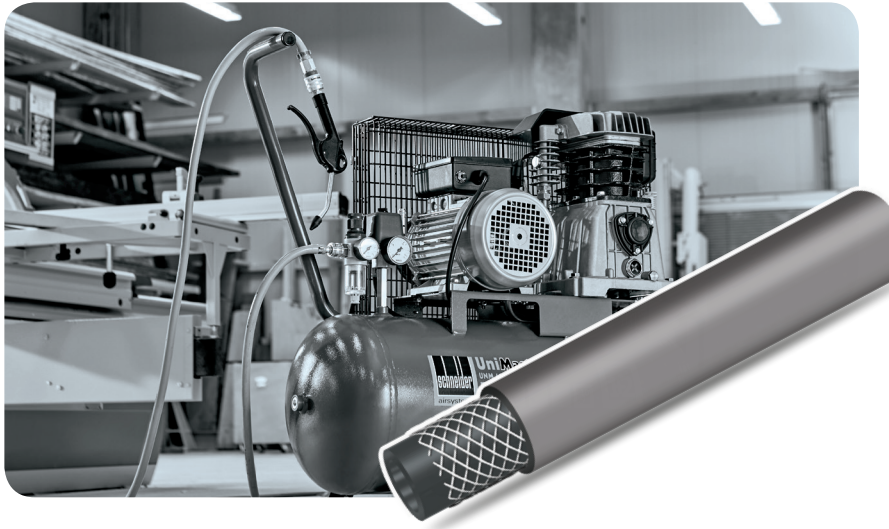

软管用于输送压缩空气，适合连接空压机使用，工作压力20bar/290psi。高韧性PVC软管，低温耐寒，聚酯线编织加强。

Hose for compressed air passage, ideal for compressors, used with pressures up to 20 bar/290 psi. Highly flexible PVC hose also at low temperatures with high strength polyester reinforcement.

- 柔韧性 - Flexibility
- 内壁光滑度 - Smooth internal surface
- 低温柔韧性 - Cold flexibility
- 抗紫外线 - UV resistance
- 20°C/+60°C 工作温度 - Working temperature



英寸 Inches	内径 Ø internal	外径 Ø external	壁厚 Thickness	工作压力 Working pressure	爆破压力 Bursting pressure	负压 Vacuum	弯曲半径 Bending radius	长度 Length	每米重量 Weight per meter
inc	mm	mm	mm	bar	bar	mH ₂ O	mm	m	g/m
1/4	6	11	2,35	20	60	-	-	50	77
-	8	13	2,50	20	60	-	-	100	107
-	9	14,50	2,75	20	60	-	-	50	128
-	10	15,50	2,75	20	60	-	-	50	133
1/2	13	19	3,15	20	60	-	-	50	189

工作 / 爆破压力为常温23°C时的数值
Working and Bursting pressure at 23°C