


fit venflex pu ld

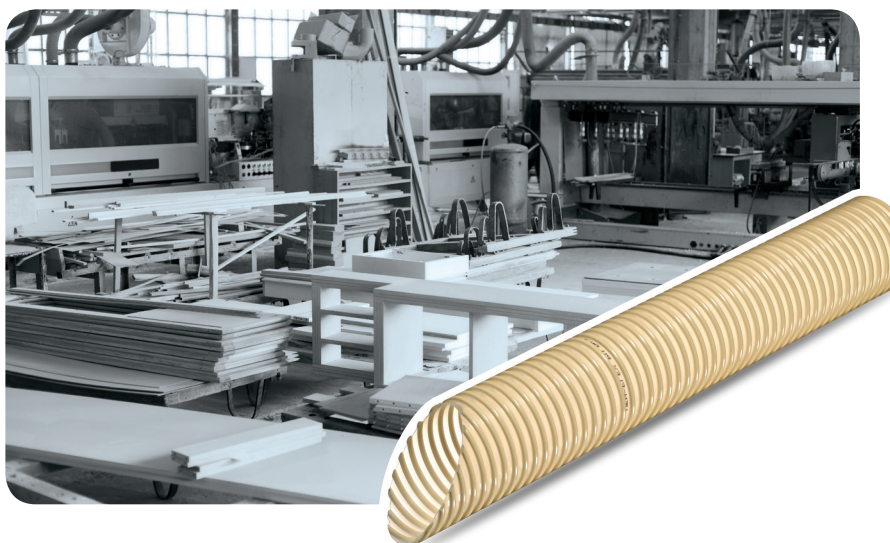

耐磨吸尘软管。PU螺旋软管采用硬质抗震PVC螺旋加强。

对于模拟物A-B-C,符合欧盟法规Reg. (EU) 10/2011的要求。

Dust extraction hose with anti-abrasive properties. PU spiral hose with reinforcement spiral in rigid shock-resistant PVC.

In compliance with the European Regulation Reg. (EU) 10/2011 for simulants A-B-C.

- 耐磨损 - Abrasion resistance
- 柔韧性 - Flexibility
- 内壁光滑度 - Smooth internal surface
- 耐臭氧 - Ozone resistance
- 40°C/+75°C 工作温度 - Working temperature



英寸 Inches	内径 Ø internal	外径 Ø external	壁厚 Thickness	工作压力 Working pressure	爆破压力 Bursting pressure	负压 Vacuum	弯曲半径 Bending radius	长度 Length	每米重量 Weight per meter
inc	mm	mm	mm	bar	bar	mH ₂ O	mm	m	g/m
1 1/4	32	37,00	2,5	-	-	3	32	20	175
-	35	40,20	2,6	-	-	3	35	20	190
1 1/2	38	43,40	2,7	-	-	3	38	20	200
-	40	45,60	2,8	-	-	3	40	20	230
1 3/4	45	50,80	2,9	-	-	3	45	20	270
2	50	56,40	3,2	-	-	3	50	20	310
-	60	66,80	3,4	-	-	2	60	20	390
2 1/2	63	70,00	3,5	-	-	2	63	20	440
-	70	79,40	4,7	-	-	2	70	20	467
3	76	85,60	4,8	-	-	2	76	20	543
-	80	90,40	5,2	-	-	2	80	20	629
-	90	100,60	5,3	-	-	2	90	20	718
-	100	111,00	5,5	-	-	2	100	20	833
-	110	121,60	5,8	-	-	1	110	20	971
-	120	132,00	6,0	-	-	1	120	20	1007
-	125	137,20	6,1	-	-	1	125	20	1082
-	130	142,60	6,3	-	-	1	130	20	1185
-	140	152,80	6,4	-	-	1	140	20	1263
-	150	163,20	6,6	-	-	1	150	20	1334
-	160	173,20	6,6	-	-	1	150	20	1512

工作 / 爆破压力为常温23°C时的数值
Working and Bursting pressure at 23°C